

LAUREL MOUNTAIN WHIRLPOOLS

BERKS I & II

I WHIRLPOOL 4066BW
 AIR BATH 4066BA
 COMBO BATH 4066BWA
 TUB ONLY 4066BT


II WHIRLPOOL 4272BW
 AIR BATH 4272BA
 COMBO BATH 4272BWA
 TUB ONLY 4272BT

INSTALLATIONS NOTES:

Install this polymer composite fixture according to the installation manual. Confirm specifications before starting installation.

ELECTRICAL REQUIREMENTS:

Whirlpool pump/motor: 120V, 20A, 60HZ
 Air Blower/Heater: 120V, 20A, 60HZ
 Dedicated GFCI required

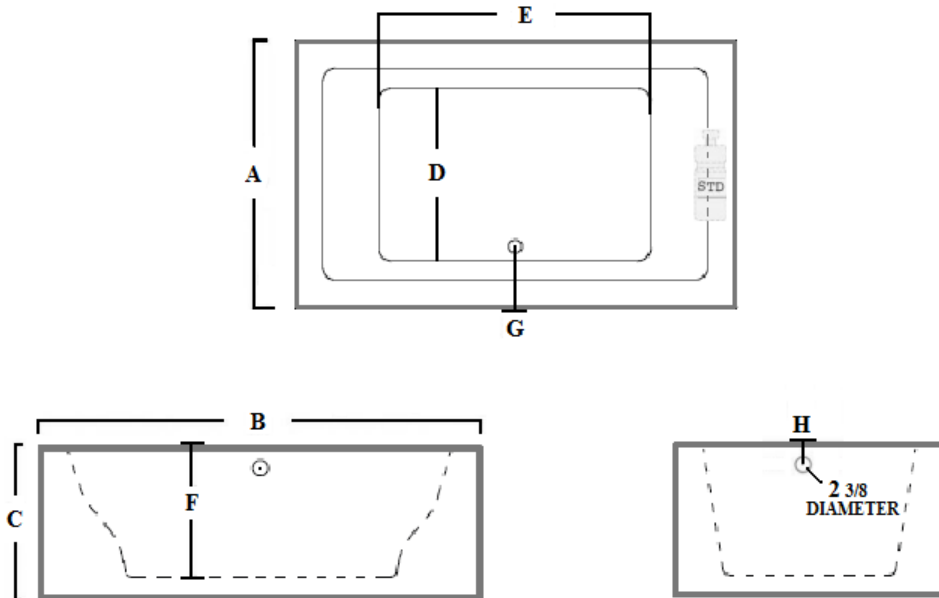

MODEL #	A	B	C	D	E	F	G	H
4066	40	66	23	26	40	20	9	3
4272	42	72	23	28	47	20	9	3

MODEL #	WATER CAPACITY OPERATING LEVEL	WATER CAPACITY TO OVERFLOW	WATER DEPTH TO OVERFLOW	APPROX. UNIT WT.
4066 WHIRL / AIR / COMBO	65 gal.	95 gal.	15 1/4	210
4066 SOAKER	—	95 gal.	15 1/4	165
4272 WHIRL / AIR / COMBO	70 gal.	105 gal.	15 1/4	215
4272 SOAKER	—	105 gal.	15 1/4	170



Website: www.laurelmountainwhirlpools.com
 Email: sales@laurelmountainwhirlpools.com
 Phone: 800-930-0050

Sales/Customer Service
 26 Nesbitt Rd. Suite 257
 New Castle, PA 16105