

BERKS I & II

I WHIRLPOOL 4066BW
 AIR BATH 4066BA
 COMBO BATH 4066BWA
 TUB ONLY 4066BT


II WHIRLPOOL 4272BW
 AIR BATH 4272BA
 COMBO BATH 4272BWA
 TUB ONLY 4272BT

INSTALLATIONS NOTES:

Install this polymer composite fixture according to the installation manual. Confirm specifications before starting installation.

ELECTRICAL REQUIREMENTS:

Whirlpool pump/motor: 120V, 20A, 60HZ
 Air Blower/Heater: 120V, 20A, 60HZ
 Dedicated GFCI required

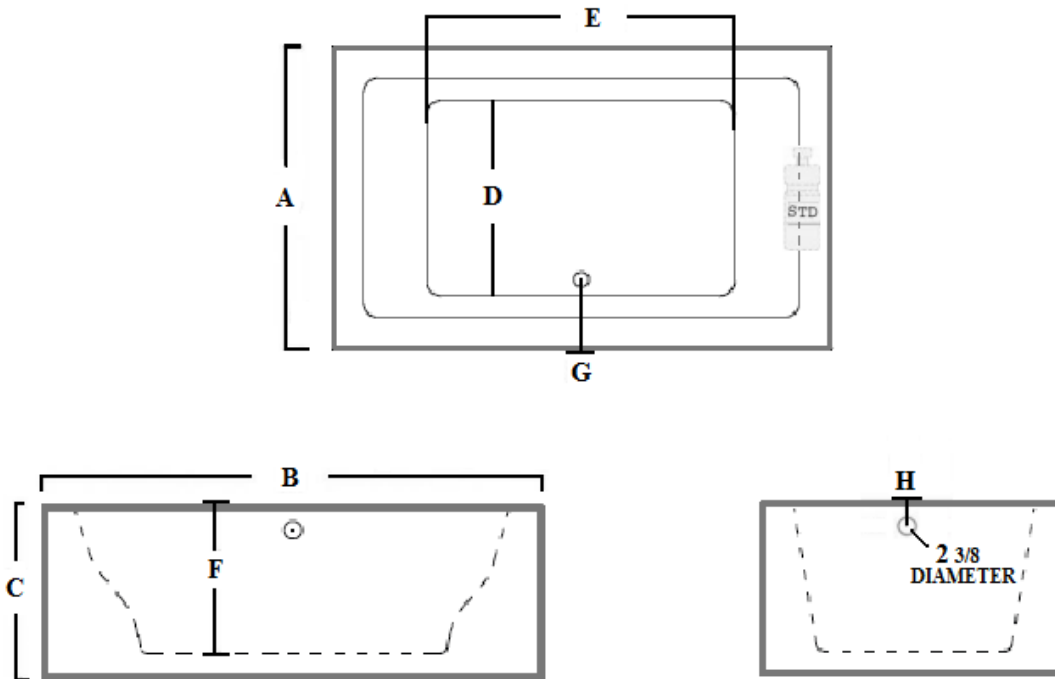

| MODEL # | A | B | C | D | E | F | G | H |
|---------|----|----|----|----|----|----|---|---|
| 4066 | 40 | 66 | 23 | 26 | 40 | 20 | 9 | 3 |
| 4272 | 42 | 72 | 23 | 28 | 47 | 20 | 9 | 3 |

| MODEL # | WATER CAPACITY OPERATING LEVEL | WATER CAPACITY TO OVERFLOW | WATER DEPTH TO OVERFLOW | APPROX. UNIT WT. |
|--------------------------|--------------------------------|----------------------------|-------------------------|------------------|
| 4066 WHIRL / AIR / COMBO | 65 gal. | 95 gal. | 15 1/4 | 210 |
| 4066 SOAKER | — | 95 gal. | 15 1/4 | 165 |
| 4272 WHIRL / AIR / COMBO | 70 gal. | 105 gal. | 15 1/4 | 215 |
| 4272 SOAKER | — | 105 gal. | 15 1/4 | 170 |



Website: www.laurelmountainwhirlpools.com
 Email: sales@laurelmountainwhirlpools.com
 Phone: 800-930-0050

Sales/Customer Service
 26 Nesbitt Rd. Suite 257
 New Castle, PA 16105