

LAUREL MOUNTAIN WHIRLPOOLS

CORRY I,II,III,IV

I WHIRLPOOL 4060CW
AIR BATH 4060CA
COMBO BATH 4060CWA
TUB ONLY 4060CT

II WHIRLPOOL 4260CW
AIR BATH 4260CA
COMBO BATH 4260CWA
TUB ONLY 4260CT

III WHIRLPOOL 4266CW
AIR BATH 4266CA
COMBO BATH 4266CWA
TUB ONLY 4266CT




IV WHIRLPOOL 4272CW
AIR BATH 4272CA
COMBO BATH 4272CWA
TUB ONLY 4272CT

INSTALLATION NOTES:
Install these acrylic fixtures according to the installation manual. Confirm specifications before starting installation.

ELECTRICAL REQUIREMENTS:
Whirlpool pump/motor: 120V, 20A, 60HZ
Air Blower/Heater: 120V, 20A, 60HZ
Dedicated GFCI required.

Undermount - Yes

*All dimensions are +/- 1/2" and subject to change without notice.

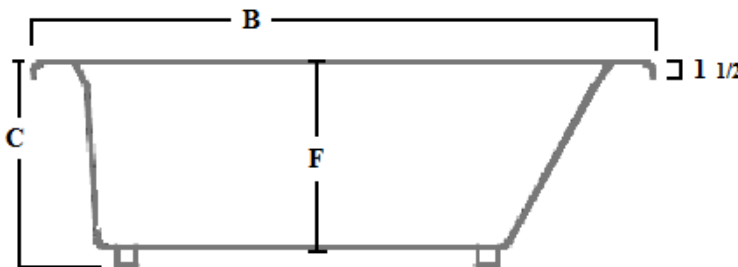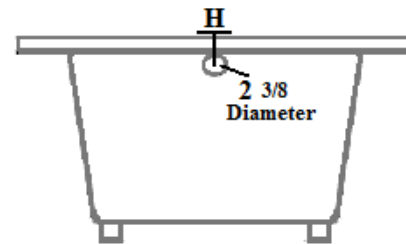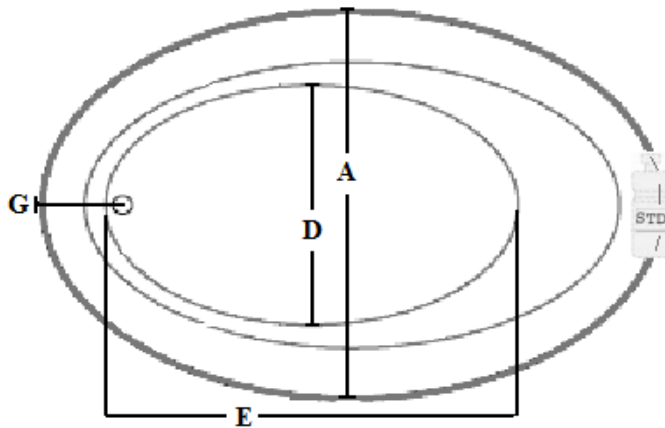

| MODEL # | A | B | C | D | E | F | G | H |
|---------|----|----|----|----|----|----|-------|---|
| 4060 | 40 | 60 | 22 | 28 | 39 | 20 | 8 1/2 | 3 |
| 4260 | 42 | 60 | 22 | 26 | 38 | 20 | 8 1/2 | 3 |
| 4266 | 42 | 66 | 22 | 26 | 44 | 20 | 8 1/2 | 3 |
| 4272 | 42 | 72 | 22 | 26 | 52 | 20 | 9 | 3 |

| MODEL # | WATER CAPACITY OPERATING LEVEL | WATER CAPACITY TO OVERFLOW | WATER DEPTH TO OVERFLOW | APPROX. UNIT WT. | SOAKER UNIT WT. |
|--------------------------|--------------------------------|----------------------------|-------------------------|------------------|-----------------|
| 4060 WHIRL / AIR / COMBO | 42 gal. | 57 gal. | 15 3/4 | 135 | 90 |
| 4260 WHIRL / AIR / COMBO | 45 gal. | 60 gal. | 15 7/8 | 140 | 95 |
| 4266 WHIRL / AIR / COMBO | 55 gal. | 75 gal. | 15 7/8 | 145 | 100 |
| 4272 WHIRL / AIR / COMBO | 55 gal. | 80 gal. | 15 3/4 | 150 | 105 |



Website: www.laurelmountainwhirlpools.com
Email: sales@laurelmountainwhirlpools.com
Phone: 800-930-0050

Sales/Customer Service
26 Nesbitt Rd. Suite 257
New Castle, PA 16105