


ROP - I N TRADE I

MODEL: #4260-DTW

ACRYLIC BATH ONLY: #4260-DTT



The acrylic whirlpool bath shall be model #4260-DTW (4260-DTT) as manufactured by Laurel Mountain Whirlpools, Inc. It shall be constructed of .125 thick cast acrylic sheet, backed by layers of polyester resin and fiberglass roving. It will be mounted on a FRP pre-levleed pump-base and two PVC/fiberglass legs. All components will be UL listed and approved. The pump motor will be 1 $\frac{1}{4}$ horsepower (1 phase, 115V, 60HZ, 3450 RPM, pre-mounted) and the plumbing system will be rigid PVC. The unit will contain 6 multi-directional jets, one air control and a safety suction fitting. Access to pump and plumbing system must be provided by installer in accordance with established plumbing and electrical codes.

ELECTRICAL SPECIFICATIONS - 115V, 20 AMP, GFCI Protected Circuit.

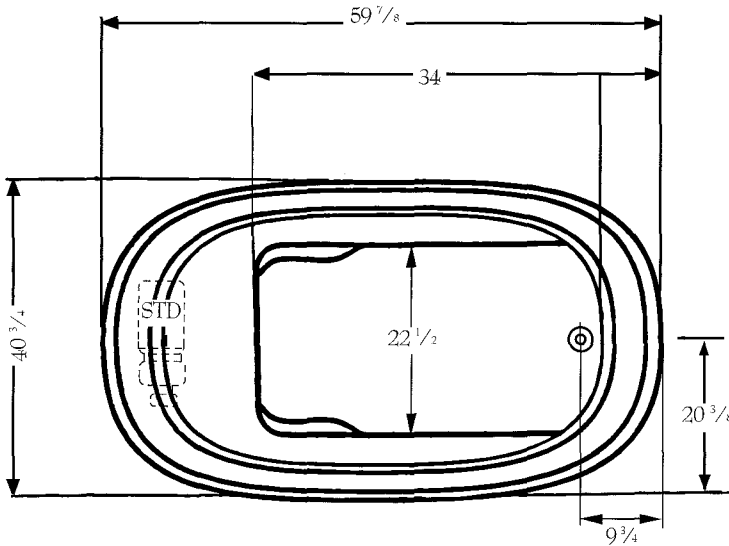

SPECIFICATIONS	WHIRLPOOL	TUB
40 $\frac{3}{4}$ " x 59 $\frac{7}{8}$ " x 23" Lip 2"		
Water Capacity - Operating Level	37.0 gal.	
- To Overflow	67.0 gal.	67.0 gal.
Approx. Unit Weight	135.0 lbs.	100.0 lbs.
Approx. Shipping Weight	190.0 lbs.	155.0 lbs.

*All dimensions are +/- $\frac{3}{8}$ " and subject to change without notice. Always pre-measure tub/whirlpool prior to framing alcove or creating deck installation cut out.

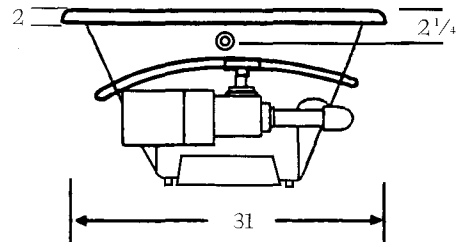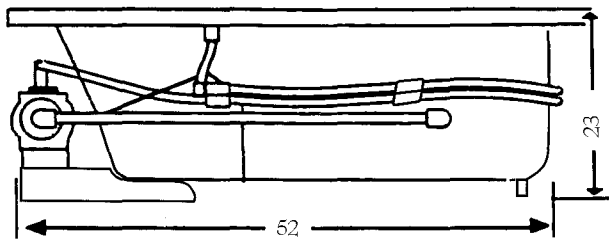

PUMP MOTOR: Standard 1 $\frac{1}{4}$ HP, Single Phase, 115V, 60HZ, 3425 RPM, Pre-installed (factory)

ELECTRICAL REQUIREMENTS: 115V, 20 AMP, GFCI Protected Circuit.

CORPORATE SALES AND MANUFACTURING HEADQUARTERS



LAUREL MOUNTAIN
WHIRLPOOLS, INC.

P.O. Box 190
1210 Airbrake Ave.
Turtle Creek, PA
15145-0190

TELEPHONE
412-829-2540
800-930-0050
E-MAIL: sales@laurel
mountainwhirlpools.com

FAX
412-829-1670
800-930-0051
www.laurelmountainwhirlpools.com