

MASTEN I & II


I WHIRLPOOL 4260MW
 AIR BATH 4260MA
 COMBO BATH 4260MWA
 TUB ONLY 4260MT

INSTALLATION NOTES: Install this acrylic fixture according to the installation manual. Confirm specifications before starting installation.


II WHIRLPOOL 4272MW
 AIR BATH 4272MA
 COMBO BATH 4272MWA
 TUB ONLY 4272MT

ELECTRICAL REQUIREMENTS:
 Whirlpool pump/motor 120V, 20A, 60HZ
 Air Blower/Heater 120V, 20A, 60HZ
 Dedicated GFCI required.

Undermount - Yes

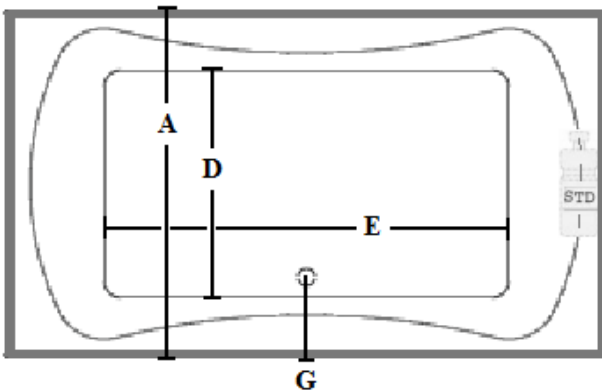

*All dimensions are +/- 1/2" and subject to change without notice.

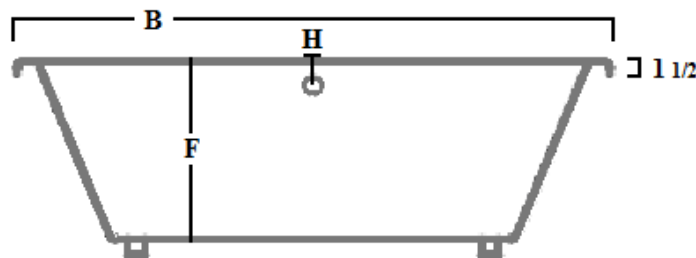

MODEL #	A	B	C	D	E	F	G	H
4260	42	60	22	28	37	20	9 1/2	3
4272	42	72	24	28	49	22	9 1/2	3

MODEL #	WATER CAPACITY OPERATING LEVEL	WATER CAPACITY TO OVERFLOW	WATER DEPTH TO OVERFLOW	APPROX. UNIT WT.	SOAKER UNIT WT.
4260 WHIRL / AIR / COMBO	45 gal.	70 gal.	16 1/4	140	95
4272 WHIRL / AIR / COMBO	68 gal.	90 gal.	17 1/4	145	100



Website: www.laurelmountainwhirlpools.com
 Email: sales@laurelmountainwhirlpools.com
 Phone: 800-930-0050

Sales/Customer Service
 26 Nesbitt Rd. Suite 257
 New Castle, PA 16105