

# ERCER IV, V & VI

VII Model # 3666-MW/3666MT

- IV MODEL: #3260-MWSR/SL  
ACRYLIC BATH ONLY: #3260-MTSR/SL
- V MODEL: #3660-MWSR/SL  
ACRYLIC BATH ONLY: #3660-MTSR/SL
- VI MODEL: #3672-MWSR/SL  
ACRYLIC BATH ONLY: #3672-MTSR/SL

The acrylic whirlpool bath models shown on this page are manufactured by Laurel Mountain Whirlpools, Inc. The models shall be constructed of .125 thick cast acrylic sheet, backed by layers of polyester resin and fiberglass roving. It will be mounted on a FRP pre-leveled base. All components will be UL listed and approved. The pump motor will be 2 horsepower (1 phase, 115V, 60HZ, 3450 RPM, pre-mounted) and the plumbing system will be rigid PVC. The unit will contain 6 multi-directional, adjustable jets, dual air controls and a safety suction fitting. Access to pump and plumbing system must be provided by installer in accordance with established plumbing and electrical codes.


ELECTRICAL SPECIFICATIONS - 115V, 20 AMP, GFCI Protected Dedicated Circuit required for either Standard Air Switch or optional Solo Touch Electronic System. Additional identical circuit required with optional installed heater.

\*All dimensions are +/- 3/8" and subject to change without notice. Always pre-measure tub/whirlpool prior to framing alcove or creating deck installation cut out.

\*\*Access panels on skirted tub only are available only when ordered as an upgrade option.

\*\*\*All models shown are made with an integral skirt and an integral nailing flange.

\*\*\*\*NOTE: Alternate pump locations not available on 3260-MW SR/SL.

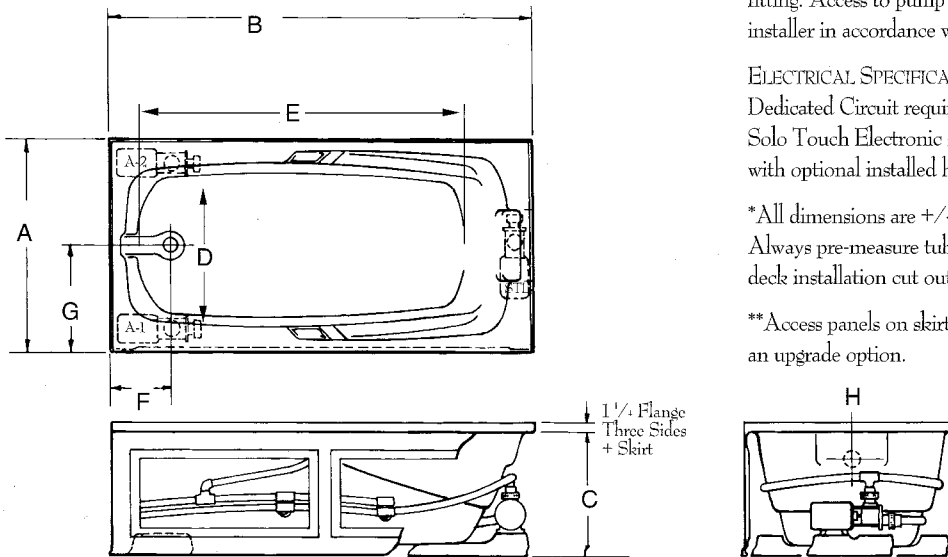

MODEL #	A	B	C	D	E	F	G	H
3260-MWSR/SL / 3260-MTSR/SL	32	59 <sup>3</sup> / <sub>4</sub>	21 <sup>1</sup> / <sub>2</sub>	16	37	9 <sup>1</sup> / <sub>2</sub>	16	5 <sup>1</sup> / <sub>2</sub>
3660-MWSR/SL / 3660-MTSR/SL	36	59 <sup>3</sup> / <sub>4</sub>	21 <sup>1</sup> / <sub>2</sub>	19	37	10	18	5 <sup>1</sup> / <sub>2</sub>
3672-MWSR/SL / 3672-MTSR/SL	36	71 <sup>3</sup> / <sub>4</sub>	21 <sup>1</sup> / <sub>2</sub>	19	50	10	18	5 <sup>1</sup> / <sub>2</sub>
<b>3666MW / 3666MT</b>	<b>36</b>	<b>65<sup>3</sup>/<sub>4</sub></b>	<b>21<sup>1</sup>/<sub>2</sub></b>	<b>19</b>	<b>44</b>	<b>10</b>	<b>18</b>	<b>5<sup>1</sup>/<sub>2</sub></b>

MODEL #	WATER CAPACITY OPERATING LEVEL	WATER CAPACITY TO OVERFLOW	APPROX. UNIT WT.	APPROX. SHIPPING WT.
3260-MWSR/SL	41 gal.	54 gal.	120 lbs.	185 lbs.
3260-MTSR/SL	-	54 gal.	85 lbs.	150 lbs.
3660-MWSR/SL	44 gal.	58 gal.	135 lbs.	200 lbs.
3660-MTSR/SL	-	58 gal.	100 lbs.	165 lbs.
3672-MWSR/SL	51 gal.	71 gal.	145 lbs.	210 lbs.
3672-MTSR/SL	-	71 gal.	110 lbs.	175 lbs.

3666MW / 3666MT 47 gal. (64 gal.)  
CORPORATE SALES AND MANUFACTURING HEADQUARTERS

140 lbs  
115 lbs.  
205 lbs  
180 lbs



LAUREL MOUNTAIN  
WHIRLPOOLS, INC.

P.O. Box 190  
1210 Airbrake Ave.  
Turtle Creek, PA  
15145-0190

TELEPHONE  
412-829-2540  
800-930-0050  
E-MAIL: sales@laurel  
mountainwhirlpools.com

FAX  
412-829-1670  
800-930-0051  
WEB SITE:

http://www.laurelmountainwhirlpools.com