


# L A R G E T R A D E I I

MODEL: #4872-LTW

ACRYLIC BATH ONLY: #4872-LTT



The acrylic whirlpool bath shall be model #4872-LTW (4872-LTT) as manufactured by Laurel Mountain Whirlpools, Inc. It shall be constructed of .125 thick cast acrylic sheet, backed by layers of polyester resin and fiberglass roving. It will be mounted on a FRP pre-leveled pump-base and two PVC/fiberglass legs. All components will be UL listed and approved. The pump motor will be 1 1/4 horsepower (1 phase, 115V, 60HZ, 3425 RPM, pre-mounted) and the plumbing system will be rigid PVC. The unit will contain 6 multi-directional jets, one air control and a safety suction fitting. Access to pump and plumbing system must be provided by installer in accordance with established plumbing and electrical codes.

ELECTRICAL SPECIFICATIONS - 115V, 20 AMP, GFCI Protected Circuit.

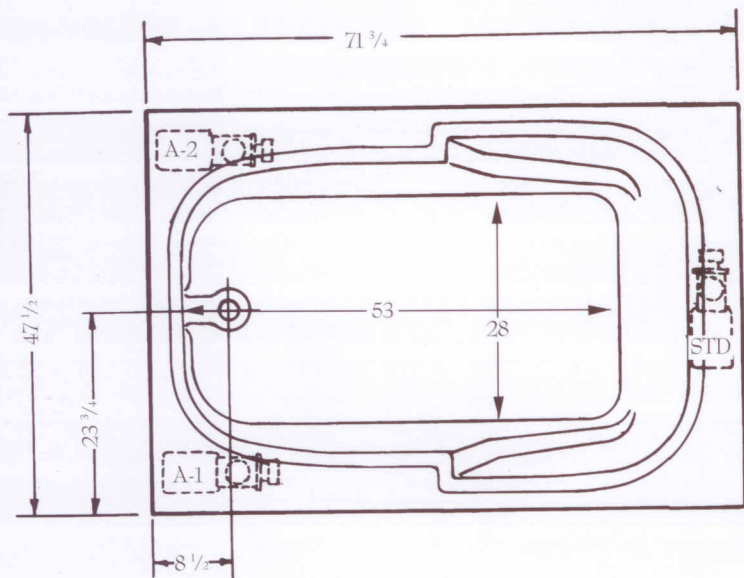

| SPECIFICATIONS                         | WHIRLPOOL  | TUB        |
|--|------------|------------|
| 47 1/2" x 71 3/4" x 23" Lip 2"         |            |            |
| Water Capacity - Operating Level ..... | 90.0 gal.  |            |
| - To Overflow .....                    | 108.0 gal. | 108.0 gal. |
| Approx. Unit Weight .....              | 220.0 lbs. | 180.0 lbs. |
| Approx. Shipping Weight .....          | 230.0 lbs. | 190.0 lbs. |

\*All dimensions are +/- 3/8" and subject to change without notice. Always pre-measure tub/whirlpool prior to framing alcove or creating deck installation cut out.

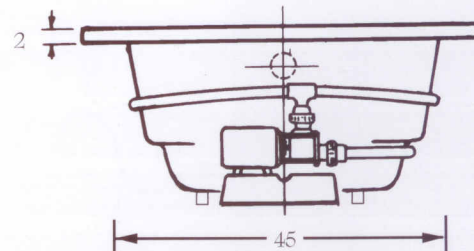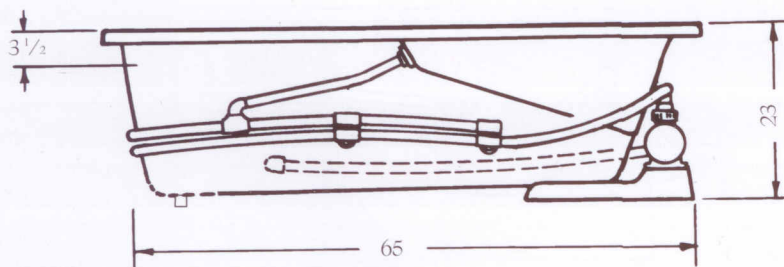

PUMP MOTOR: Standard 1 1/4 HP, Single Phase, 115V, 60HZ, 3425 RPM, Pre-installed (factory)

ELECTRICAL REQUIREMENTS: 115V, 20 AMP, GFCI Protected Circuit.

CORPORATE SALES AND MANUFACTURING HEADQUARTERS



LAUREL MOUNTAIN  
WHIRLPOOLS, INC.

P.O. Box 190  
1210 Airbrake Ave.  
Turtle Creek, PA  
15145-0190

TELEPHONE  
412-829-2540  
800-930-0050  
E-MAIL: sales@laurel  
mountainwhirlpools.com

FAX  
412-829-1670  
800-930-0051  
www.laurelmountainwhirlpools.com